

# MicroProfile OpenAPI Specification

Arthur De Magalhaes (Spec Lead), Eric Wittmann, Anna Safonov, Matt Gill, Ivan Junckes Filho, Jérémie Bresson, Jana Manoharan, Rui Qi Wang, Tommy Wojtczak, Martin Smithson, Michael Edgar

3.0-RC5, November 02, 2021: Draft

# Table of Contents

Copyright .....	2
Eclipse Foundation Specification License .....	2
Disclaimers .....	2
Introduction .....	4
Architecture .....	5
Configuration .....	6
List of configurable items .....	6
Core configurations .....	6
Vendor extensions .....	7
Documentation Mechanisms .....	8
Annotations .....	8
Quick overview of annotations .....	8
Overrides .....	10
Detailed usage of key annotations .....	10
Operation .....	10
RequestBody .....	12
Servers .....	13
Schema .....	16
Static OpenAPI files .....	17
Location and formats .....	17
Programming model .....	17
OASFactory .....	17
OASModelReader .....	18
Filter .....	18
OASFilter .....	18
Processing rules .....	19
OpenAPI Endpoint .....	20
Overview .....	20
Content format .....	20
Query parameters .....	20
Context root behavior .....	20
Multiple applications .....	20
Integration with other MicroProfile specifications .....	22
MicroProfile Rest Client .....	22
Limitations .....	23
Internationalization .....	23
Validation .....	23
Cross Origin Resource Sharing (CORS) .....	23

Release Notes for Microprofile OpenAPI 3.0 .....	24
Incompatible Changes .....	24
API/SPI Changes .....	24
Other Changes .....	24
Release Notes for Microprofile OpenAPI 2.0 .....	25
Incompatible Changes .....	25
API/SPI Changes .....	27
Functional Changes .....	28
Other Changes .....	28
Release Notes for Microprofile OpenAPI 1.1 .....	29
Release Notes for MicroProfile OpenAPI 1.0 .....	30

Specification: MicroProfile OpenAPI Specification

Version: 3.0-RC5

Status: Draft

Release: November 02, 2021

# Copyright

Copyright (c) 2017, 2021 Eclipse Foundation.

## Eclipse Foundation Specification License

By using and/or copying this document, or the Eclipse Foundation document from which this statement is linked, you (the licensee) agree that you have read, understood, and will comply with the following terms and conditions:

Permission to copy, and distribute the contents of this document, or the Eclipse Foundation document from which this statement is linked, in any medium for any purpose and without fee or royalty is hereby granted, provided that you include the following on ALL copies of the document, or portions thereof, that you use:

- link or URL to the original Eclipse Foundation document.
- All existing copyright notices, or if one does not exist, a notice (hypertext is preferred, but a textual representation is permitted) of the form: "Copyright (c) [\$date-of-document] Eclipse Foundation, Inc. <<url to this license>>"

Inclusion of the full text of this NOTICE must be provided. We request that authorship attribution be provided in any software, documents, or other items or products that you create pursuant to the implementation of the contents of this document, or any portion thereof.

No right to create modifications or derivatives of Eclipse Foundation documents is granted pursuant to this license, except anyone may prepare and distribute derivative works and portions of this document in software that implements the specification, in supporting materials accompanying such software, and in documentation of such software, PROVIDED that all such works include the notice below. HOWEVER, the publication of derivative works of this document for use as a technical specification is expressly prohibited.

The notice is:

"Copyright (c) [\$date-of-document] Eclipse Foundation. This software or document includes material copied from or derived from [title and URI of the Eclipse Foundation specification document]."

### Disclaimers

THIS DOCUMENT IS PROVIDED "AS IS," AND THE COPYRIGHT HOLDERS AND THE ECLIPSE FOUNDATION MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; THAT THE CONTENTS OF THE DOCUMENT ARE SUITABLE FOR ANY PURPOSE; NOR THAT THE IMPLEMENTATION OF SUCH CONTENTS WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

THE COPYRIGHT HOLDERS AND THE ECLIPSE FOUNDATION WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY USE OF THE

DOCUMENT OR THE PERFORMANCE OR IMPLEMENTATION OF THE CONTENTS THEREOF.

The name and trademarks of the copyright holders or the Eclipse Foundation may NOT be used in advertising or publicity pertaining to this document or its contents without specific, written prior permission. Title to copyright in this document will at all times remain with copyright holders.

:sectnums:

# Introduction


Exposing APIs has become an essential part of all modern applications. At the center of this revolution known as the API Economy we find RESTful APIs, which can transform any application into language agnostic services that can be called from anywhere: on-premises, private cloud, public cloud, etc.

For the clients and providers of these services to connect there needs to be a clear and complete contract. Similar to the WSDL contract for legacy Web Services, the [OpenAPI v3](#) specification is the contract for RESTful Services.

This MicroProfile specification, called OpenAPI 1.0, aims to provide a set of Java interfaces and programming models which allow Java developers to natively produce OpenAPI v3 documents from their JAX-RS applications.

# Architecture

There are different ways to augment a JAX-RS application in order to produce an OpenAPI document, which are described in [Documentation Mechanisms](#). The picture below provides a quick overview of the different types of components that make up the MP OpenAPI specification:

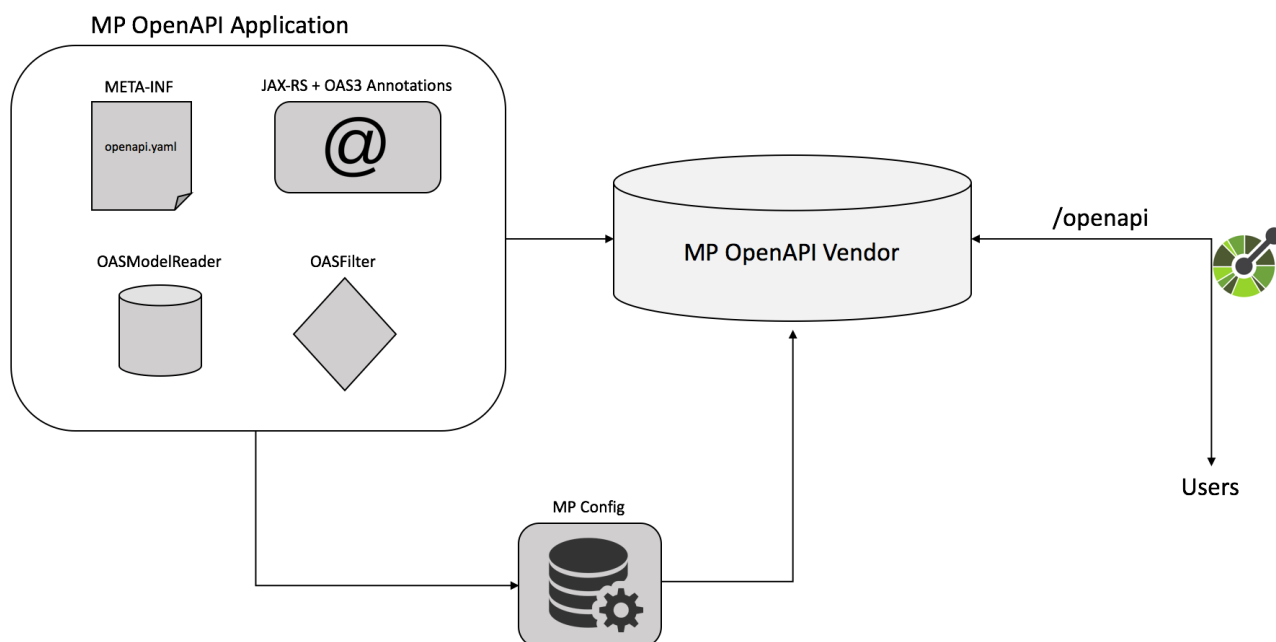

The remaining sections of this specification will go into the details of each component.



# Configuration

Configuration of various parts of this specification is provided via the [MicroProfile Config](#) mechanism, which means that vendors implementing the MP OpenAPI specification must also implement the MP Config specification.

There are various ways to inject these configuration values into an MP OpenAPI framework, including the [default ConfigSource](#) as well as [custom ConfigSource](#).

Vendors implementing the MP OpenAPI specification can optionally provide additional native ways for these configuration values to be injected into the framework (e.g. via a server configuration file), as long as they also implement the MP Config specification.

## List of configurable items

Vendors must support all the [Core configurations](#) of this specification. Optionally, they may also support [Vendor extensions](#) that allow the configuration of framework-specific values for configurations that affect implementation behavior.

For convenience of vendors (and application developers using custom ConfigSources), the full list of supported configuration keys is available as constants in the [OASConfig](#) class.

### Core configurations

The following is a list of configuration values that every vendor must support.

#### `mp.openapi.model.reader`

Configuration property to specify the fully qualified name of the [OASModelReader](#) implementation.

#### `mp.openapi.filter`

Configuration property to specify the fully qualified name of the [OASFilter](#) implementation.

#### `mp.openapi.scan.disable`

Configuration property to disable annotation scanning. Default value is `false`.

#### `mp.openapi.scan.packages`

Configuration property to specify the list of packages to scan. For example, `mp.openapi.scan.packages=com.xyz.PackageA,com.xyz.PackageB`

#### `mp.openapi.scan.classes`

Configuration property to specify the list of classes to scan. For example, `mp.openapi.scan.classes=com.xyz.MyClassA,com.xyz.MyClassB`

#### `mp.openapi.scan.exclude.packages`

Configuration property to specify the list of packages to exclude from scans. For example, `mp.openapi.scan.exclude.packages=com.xyz.PackageC,com.xyz.PackageD`

### `mp.openapi.scan.exclude.classes`

Configuration property to specify the list of classes to exclude from scans. For example, `mp.openapi.scan.exclude.classes=com.xyz.MyClassC,com.xyz.MyClassD`

### `mp.openapi.servers`

Configuration property to specify the list of global servers that provide connectivity information. For example, `mp.openapi.servers=https://xyz.com/v1,https://abc.com/v1`

### `mp.openapi.servers.path.`

Prefix of the configuration property to specify an alternative list of servers to service all operations in a path. For example, `mp.openapi.servers.path./airlines/bookings/{id}=https://xyz.io/v1`

### `mp.openapi.servers.operation.`

Prefix of the configuration property to specify an alternative list of servers to service an operation. Operations that want to specify an alternative list of servers must define an `operationId`, a unique string used to identify the operation. For example, `mp.openapi.servers.operation.getBooking=https://abc.io/v1`

### `mp.openapi.schema.`

Prefix of the configuration property to specify a schema for a specific class, in JSON format. The remainder of the property key must be the fully-qualified class name. The value must be a valid OpenAPI schema object, specified in the JSON format. The use of this property is functionally equivalent to the use of the `@Schema` annotation on a Java class, but may be used in cases where the application developer does not have access to the source code of a class.

When a `name` key is provided with a string value, the schema will be added to the `schemas` collection in the `components` object of the resulting OpenAPI document using `name`'s value as the key.

For example, in the case where an application wishes to represent Java `Dates` in epoch milliseconds, the following configuration could be used (line escapes and indentation added for readability):

```
mp.openapi.schema.java.util.Date = { \  
  "name": "EpochMillis" \  
  "type": "number", \  
  "format": "int64", \  
  "description": "Milliseconds since January 1, 1970, 00:00:00 GMT" \  
}
```

## Vendor extensions

Vendors that wish to provide vendor-specific configuration via MP Config (instead of another native configuration framework) must use the prefix `mp.openapi.extensions`.

# Documentation Mechanisms

There are many different ways to provide input for the generation of the resulting OpenAPI document.

The MP OpenAPI specification requires vendors to produce a valid OpenAPI document from pure JAX-RS 2.0 applications. This means that vendors must process all the relevant JAX-RS annotations (such as `@Path` and `@Consumes`) as well as Java objects (POJOs) used as input or output to JAX-RS operations. This is a good place to start for application developers that are new to OpenAPI: just deploy your existing JAX-RS application into a MP OpenAPI vendor and check out the output from `/openapi!`

The application developer then has a few choices:

1. Augment those JAX-RS annotations with the OpenAPI [Annotations](#). Using annotations means developers don't have to re-write the portions of the OpenAPI document that are already covered by the JAX-RS framework (e.g. the HTTP method of an operation).
2. Take the initial output from `/openapi` as a starting point to document your APIs via [Static OpenAPI files](#). It's worth mentioning that these static files can also be written before any code, which is an approach often adopted by enterprises that want to lock-in the contract of the API. In this case, we refer to the OpenAPI document as the "source of truth", by which the client and provider must abide.
3. Use the [Programming model](#) to provide a bootstrap (or complete) OpenAPI model tree.

Additionally, a [Filter](#) is described which can update the OpenAPI model after it has been built from the previously described documentation mechanisms.

## Annotations

Many of these OpenAPI v3 annotations were derived from the [Swagger Core](#) library, which allows for a mostly-mechanical transformation of applications that are using that library and wish to take advantage to the official MP OpenAPI interfaces.

### Quick overview of annotations

The following annotations are found in the [org.eclipse.microprofile.openapi.annotations](https://org.eclipse.microprofile.openapi.annotations) package.

Annotation	Description
<a href="#">@Callback</a>	Represents a callback URL that will be invoked.
<a href="#">@Callbacks</a>	Represents an array of Callback URLs that can be invoked.
<a href="#">@CallbackOperation</a>	Represents an operation that will be invoked during the callback.
<a href="#">@Components</a>	A container that holds various reusable objects for different aspects of the OpenAPI Specification.
<a href="#">@Explode</a>	Enumeration used to define the value of the <code>explode</code> property.

Annotation	Description
@ParameterIn	Enumeration representing the parameter's <b>in</b> property.
@ParameterStyle	Enumeration for the parameter's <b>style</b> property.
@SecuritySchemeIn	Enumeration for the security scheme's <b>in</b> property.
@SecuritySchemeType	Enumeration for the security scheme's <b>type</b> property.
@Extension	Adds an extension with contained properties.
@Extensions	Adds custom properties to an extension.
@ExternalDocumentation	References an external resource for extended documentation.
@Header	Describes a single header object.
@Contact	Contact information for the exposed API.
@Info	This annotation encapsulates metadata about the API.
@License	License information for the exposed API.
@Link	Represents a design-time link for a response.
@LinkParameter	Represents a parameter to pass to the linked operation.
@Content	Provides schema and examples for a particular media type.
@DiscriminatorMapping	Used to differentiate between other schemas which may satisfy the payload description.
@Encoding	Single encoding definition to be applied to single Schema Object.
@ExampleObject	Illustrates an example of a particular content.
@Schema	Allows the definition of input and output data types.
@SchemaProperty	Allows the definition of a property nested within a parent @Schema.
@OpenAPIDefinition	General metadata for an OpenAPI definition.
@Operation	Describes an operation or typically a HTTP method against a specific path.
@Parameter	Describes a single operation parameter.
@Parameters	Encapsulates input parameters.
@RequestBody	Describes a single request body.
@RequestBodySchema	Describes a single request body with schema implementation class.
@APIResponse	Describes a single response from an API operation.
@APIResponses	A container for multiple responses from an API operation.
@APIResponseSchema	Describes a single response with schema implementation class from an API operation.

Annotation	Description
<a href="#">@OAuthFlow</a>	Configuration details for a supported OAuth Flow.
<a href="#">@OAuthFlows</a>	Allows configuration of the supported OAuth Flows.
<a href="#">@OAuthScope</a>	Represents an OAuth scope.
<a href="#">@SecurityRequirement</a>	Specifies a security requirement for an operation.
<a href="#">@SecurityRequirements</a>	Represents an array of security requirements where only one needs to be satisfied.
<a href="#">@SecurityRequirementsSet</a>	Represents an array of security requirements that need to be satisfied.
<a href="#">@SecurityScheme</a>	Defines a security scheme that can be used by the operations.
<a href="#">@SecuritySchemes</a>	Represents an array of security schemes that can be specified.
<a href="#">@Server</a>	Represents a server used in an operation or used by all operations in an OpenAPI document.
<a href="#">@Servers</a>	A container for multiple server definitions.
<a href="#">@ServerVariable</a>	Represents a server variable for server URL template substitution.
<a href="#">@Tag</a>	Represents a tag for the API endpoint.
<a href="#">@Tags</a>	A container of multiple tags.

## Overrides

When the same annotation is used on a class and a method, the values from the method instance will take precedence for that particular method. This commonly occurs with the [@Server](#) and [@Tag](#) annotations.

In other cases, such as with [@Parameter](#) and [@RequestBody](#), the annotation values from the method's parameters takes precedence over corresponding annotation values from the method itself - in this scenario the combined usage of these annotations is allowed but discouraged, as it is error prone.

The [@Schema](#) annotation has a complex set of possible combinations. It can be placed on POJOs (and their fields / methods) and referenced from many other annotations. In the event that a [@Schema#implementation](#) value points to a POJO that also contains a [@Schema](#) annotation, the values are merged but with precedence given to the referrer annotation (i.e. the one that contains the [implementation](#) key). This allows POJO models to be reusable and configurable.

## Detailed usage of key annotations

### Operation

### Sample 1 - Simple operation description

```
@GET
@Path("/findByStatus")
@Operation(summary = "Finds Pets by status",
           description = "Multiple status values can be provided with comma separated strings")
public Response findPetsByStatus(...) { ... }
```

### Output for Sample 1

```
/pet/findByStatus:
  get:
    summary: Finds Pets by status
    description: Multiple status values can be provided with comma separated strings
    operationId: findPetsByStatus
```

### Sample 2 - Operation with different responses

```
@GET
@Path("/{username}")
@Operation(summary = "Get user by user name")
@ApiResponse(description = "The user",
              content = @Content(mediaType = "application/json",
                                schema = @Schema(implementation = User.class))),
@ApiResponse(responseCode = "400", description = "User not found")
public Response getUserByName(
    @Parameter(description = "The name that needs to be fetched. Use user1 for testing. ", required = true) @PathParam("username") String username)
{...}
```

## Output for Sample 2

```
/user/{username}:
  get:
    summary: Get user by user name
    operationId: getUserByName
    parameters:
      - name: username
        in: path
        description: 'The name that needs to be fetched. Use user1 for testing. '
        required: true
        schema:
          type: string
    responses:
      default:
        description: The user
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/User'
      400:
        description: User not found
```

## RequestBody

### Sample 1 - Simple RequestBody

```
@POST
@Path("/user")
@Operation(summary = "Create user",
  description = "This can only be done by the logged in user.")
public Response methodWithRequestBody(
  @RequestBody(description = "Created user object", required = true,
    content = @Content(schema = @Schema(implementation = User.
class))) User user,
  @QueryParam("name") String name, @QueryParam("code") String code)
{ ... }
```

## Output for Sample 1

```
post:
  summary: Create user
  description: This can only be done by the logged in user.
  operationId: methodWithRequestBody
  parameters:
  - name: name
    in: query
    schema:
      type: string
  - name: code
    in: query
    schema:
      type: string
  requestBody:
    description: Created user object
    content:
      '*/*':
        schema:
          $ref: '#/components/schemas/User'
          required: true
  responses:
    default:
      description: no description
```

## Servers

### Sample 1 - Extended Server scenarios

```
@OpenAPIDefinition(
  servers = {
    @Server(
      description = "definition server 1",
      url = "http://{var1}.definition1/{var2}",
      variables = {
        @ServerVariable(name = "var1",
          description = "var 1",
          defaultValue = "1",
          enumeration = {"1", "2"}),
        @ServerVariable(name = "var2",
          description = "var 2",
          defaultValue = "1",
          enumeration = {"1", "2"})
      }
    )
  }
)
@Server(
  description = "class server 1",
  url = "http://{var1}.class1/{var2}",
  variables = {
    @ServerVariable(
      name = "var1",
```



```

        description = "var 1",
        defaultValue = "1",
        enumeration = {"1", "2"}),
    @ServerVariable(
        name = "var2",
        description = "var 2",
        defaultValue = "1",
        enumeration = {"1", "2"}))
@Server(
    description = "class server 2",
    url = "http://{var1}.class2",
    variables = {
        @ServerVariable(
            name = "var1",
            description = "var 1",
            defaultValue = "1",
            enumeration = {"1", "2"}))
public class ServersResource {

    @GET
    @Path("/")
    @Server(
        description = "method server 1",
        url = "http://{var1}.method1",
        variables = {
            @ServerVariable(
                name = "var1",
                description = "var 1",
                defaultValue = "1",
                enumeration = {"1", "2"}))
    @Server(
        description = "method server 2",
        url = "http://method2"
    )
    public Response getServers() {
        return Response.ok().entity("ok").build();
    }
}

```

### Output for Sample 1

```

openapi: 3.0.2
servers:
- url: http://{var1}.definition1/{var2}
  description: definition server 1
  variables:
    var1:
      description: var 1
      enum:
        - "1"
        - "2"

```

```

    default: "1"
  var2:
    description: var 2
    enum:
      - "1"
      - "2"
    default: "1"
  paths:
    /:
      get:
        operationId: getServers
        responses:
          default:
            description: default response
        servers:
          - url: http://{var1}.class1/{var2}
            description: class server 1
            variables:
              var1:
                description: var 1
                enum:
                  - "1"
                  - "2"
                default: "1"
              var2:
                description: var 2
                enum:
                  - "1"
                  - "2"
                default: "1"
          - url: http://{var1}.class2
            description: class server 2
            variables:
              var1:
                description: var 1
                enum:
                  - "1"
                  - "2"
                default: "1"
          - url: http://{var1}.method1
            description: method server 1
            variables:
              var1:
                description: var 1
                enum:
                  - "1"
                  - "2"
                default: "1"
          - url: http://method2
            description: method server 2
            variables: {}

```

## Schema

### Sample 1 - Schema POJO

```
@Schema(name="MyBooking", description="POJO that represents a booking.")
public class Booking {
    @Schema(required = true, example = "32126319")
    private String airMiles;

    @Schema(required = true, example = "window")
    private String seatPreference;
}
```

### Output for Sample 1

```
components:
  schemas:
    MyBooking:
      description: POJO that represents a booking.
      required:
        - airMiles
        - seatPreference
      type: object
      properties:
        airMiles:
          type: string
          example: "32126319"
        seatPreference:
          type: string
          example: window
```

### Sample 2 - Schema POJO reference

```
@POST
public Response createBooking(
    @RequestBody(description = "Create a new booking.",
        content = @Content(mediaType = "application/json",
            schema = @Schema(implementation = Booking.class))
    Booking booking) {
```

```
post:
  operationId: createBooking
  requestBody:
    description: Create a new booking.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MyBooking'
```

For more samples please see the [MicroProfile Wiki](#).

## Static OpenAPI files

Application developers may wish to include a pre-generated OpenAPI document that was written separately from the code (e.g. with an editor such as [this](#)).

Depending on the scenario, the document may be fully complete or partially complete. If a document is fully complete then the application developer will want to set the `mp.openapi.scan.disable` configuration property to `true`. If a document is partially complete, then the application developer will need to augment the OpenAPI snippet with annotations, programming model, or via the filter.

### Location and formats

Vendors are required to fetch a single document named `openapi` with an extension of `yml`, `yaml` or `json`, inside the application module's root `META-INF` folder. If there is more than one document found that matches one of these extensions the behavior of which file is chosen is undefined (i.e. each vendor may implement their own logic), which means that application developers should only place a single `openapi` document into that folder.

For convenience, you may also place your `microprofile-config.properties` in the root `META-INF` folder, if you wish to keep both documents in the same directory. This is in addition to the default locations defined by [MicroProfile Config](#).

## Programming model

Application developers are able to provide OpenAPI elements via Java POJOs. The complete set of models are found in the [org.eclipse.microprofile.openapi.models](#) package.

### OASFactory

The [OASFactory](#) is used to create all of the elements of an OpenAPI tree.

For example, the following snippet creates a simple [Info](#) element that contains a title, description, and version.

```
OASFactory.createObject(Info.class).title("Airlines").description("Airlines APIs")
.version("1.0.0");
```

## OASModelReader

The [OASModelReader](#) interface allows application developers to bootstrap the OpenAPI model tree used by the processing framework. To use it, simply create an implementation of this interface and register it using the `mp.openapi.model.reader` configuration key, where the value is the fully qualified name of the reader class.

*Sample META-INF/microprofile-config.properties*

```
mp.openapi.model.reader=com.mypackage.MyModelReader
```

Similar to static files, the model reader can be used to provide either complete or partial model trees. If providing a complete OpenAPI model tree, application developers should set the `mp.openapi.scan.disable` configuration to `true`. Otherwise this partial model will be used as the base model during the processing of the other [Documentation Mechanisms](#).

Vendors are required to call the OASReader a single time, in the order defined by the [Processing rules](#) section. Only a single OASReader instance is allowed per application.

## Filter

There are many scenarios where application developers may wish to update or remove certain elements and fields of the OpenAPI document. This is done via a filter, which is called once after all other documentation mechanisms have completed.

### OASFilter

The [OASFilter](#) interface allows application developers to receive callbacks for various key OpenAPI elements. The interface has a default implementation for every method, which allows application developers to only override the methods they care about. To use it, simply create an implementation of this interface and register it using the `mp.openapi.filter` configuration key, where the value is the fully qualified name of the filter class.

*Sample META-INF/microprofile-config.properties*

```
mp.openapi.filter=com.mypackage.MyFilter
```

Vendors are required to call the registered filter once for each filtered element. For example, the method `filterPathItem` is called **for each** corresponding `PathItem` element in the model tree. This allows application developers to filter the element and any of its descendants.

The order of filter methods called is undefined, with two exceptions:

1. All filterable descendant elements of a filtered element must be called before its ancestor.

2. The `filterOpenAPI` method must be the **last** method called on a filter (which is just a specialization of the first exception).

## Processing rules

The processed document available from the [OpenAPI Endpoint](#) is built from a variety of sources, which were outlined in the sub-headings of [Documentation Mechanisms](#). Vendors are required to process these different sources in the following order:

1. Fetch configuration values from `mp.openapi` namespace
2. Call `OASModelReader`
3. Fetch static OpenAPI file
4. Process annotations
5. Filter model via `OASFilter`

### Example processing:

- A vendor starts by fetching all available [Configuration](#). If an `OASModelReader` was specified in that configuration list, its `buildModel` method is called to form the starting OpenAPI model tree for this application.
- Any [Vendor extensions](#) are added on top of that starting model (overriding conflicts), or create a new model if an `OASModelReader` was not registered.
- The vendor searches for a file as defined in the section [Static OpenAPI files](#). If found, it will read that document and merge with the model produced by previous processing steps (if any), where conflicting elements from the static file will override the values from the original model.
- If annotation scanning was not disabled, the JAX-RS and OpenAPI annotations from the application will be processed, further overriding any conflicting elements from the current model.
- The final model is filtered by walking the model tree and invoking all registered [OASFilter](#) classes.

# OpenAPI Endpoint

## Overview

A fully processed OpenAPI document must be available at the root URL `/openapi`, as a HTTP GET operation.

For example, GET `http://myHost:myPort/openapi`.

This document represents the result of the applied [Processing rules](#).

The protocol required is `http`. Vendors are encouraged, but not required, to support the `https` protocol as well, to enable a secure connection to the OpenAPI endpoint.

## Content format

The default format of the `/openapi` endpoint is `YAML`.

Vendors must also support the `JSON` format if the request contains an `Accept` header with a value of `application/json`, in which case the response must contain a `Content-Type` header with a value of `application/json`.

## Query parameters

No query parameters are required for the `/openapi` endpoint. However, one suggested but optional query parameter for vendors to support is `format`, where the value can be either `JSON` or `YAML`, to facilitate the toggle between the default `YAML` format and `JSON` format.

## Context root behavior

Vendors are required to ensure that the combination of each global `server` element and `pathItem` element resolve to the absolute backend URL of that particular path. If that `pathItem` contains a `servers` element, then this list of operation-level `server` elements replaces the global list of servers for that particular `pathItem`.

For example: an application may have an `ApplicationPath` annotation with the value of `/`, but is assigned the context root of `/myApp` during deployment. In this case, the `server` elements (either global or operation-level) must either end with `/myApp` or a corresponding proxy. Alternatively it is valid, but discouraged, to add that context root (`/myApp`) to every `pathItem` defined in that application.

## Multiple applications

The 1.0 version of the MicroProfile OpenAPI specification does not define how the `/openapi` endpoint may be partitioned in the event that the MicroProfile runtime supports deployment of multiple applications. If an implementation wishes to support multiple applications within a

MicroProfile runtime, the semantics of the `/openapi` endpoint are expected to be the logical union of all the applications in the runtime, which would imply merging multiple OpenAPI documents into a single valid document (handling conflicting IDs and unique names).



# Integration with other MicroProfile specifications

This section will outline specific integrations between MicroProfile OpenAPI and other MicroProfile specifications.

## MicroProfile Rest Client

It is common that a microservice (A) using MicroProfile OpenAPI will also use [MicroProfile Rest Client](#) to make outbound calls into another microservice (B). In this case, we do not want the interface for microservice (B) to appear in microservice (A)'s OAS3 document.

Therefore, vendors are required to exclude from the final OAS3 document any interface annotated with [org.eclipse.microprofile.rest.client.inject.RegisterRestClient](#).

# Limitations

## Internationalization

The 1.0 version of the MicroProfile OpenAPI spec does not require vendors to support multiple languages based on the [Accept-Language](#). One reasonable approach is for vendors to support unique keys (instead of hardcoded text) via the various [Documentation Mechanisms](#), so that the implementing framework can perform a global replacement of the keys with the language-specific text that matches the [Accept-Language](#) request for the `/openapi` endpoint. A cache of processed languages can be kept to improve performance.

## Validation

The MP OpenAPI 1.0 specification does not mandate vendors to validate the resulting OpenAPI v3 model (after processing the 5 steps previously mentioned), which means that the behavior of invalid models is vendor specific (i.e. vendors may choose to ignore, reject, or pass-through invalid inputs).

## Cross Origin Resource Sharing (CORS)

The MP OpenAPI 1.0 specification does not require vendors to support [CORS](#) for the `/openapi` endpoint. The behavior of CORS requests is implementation dependent.

# Release Notes for Microprofile OpenAPI 3.0

A full list of changes delivered in the 3.0 release can be found at [MicroProfile OpenAPI 3.0 Milestone](#).

## Incompatible Changes

This release aligns with Jakarta EE 9.1 ([487](#)), so it won't work with earlier versions of Jakarta or Java EE.

## API/SPI Changes

There are no functional changes introduced in this release, except the dependency updating from javax to jakarta.

## Other Changes

- Negative Test Scenario - @SchemaProperty Precedence Behaviour ([466](#))
- Use MediaType.APPLICATION\_JSON instead of application/json in some TCKs ([471](#))
- TCK Tag Collection Test contains() side effect ([453](#))
- TestNG 7.4.0 Assert.assertNotSame has a bug which causes ModelConstructionTest TCK to fail ([494](#))

# Release Notes for Microprofile OpenAPI 2.0

A full list of changes delivered in the 2.0 release can be found at [MicroProfile OpenAPI 2.0 Milestone](#).

## Incompatible Changes

- Model interfaces that were deprecated in 1.1 have been removed:
  - `Scopes` - this interface was replaced with `Map<String, ServerVariable>` because it did not need to be extensible (328)
  - `ServerVariables` - this interface was replaced with `Map<String, ServerVariable>` because it did not need to be extensible (245)
- Model interfaces that are not extensible no longer extend `java.util.Map`:
  - `APIResponses` (248)
  - `Callback` (248)
  - `Content` (248)
  - `Path` (248)
  - `SecurityRequirement` (248)
- Methods on model interfaces that were deprecated in 1.1 have been removed:
  - `APIResponses`
    - `addApiResponse(String name, ApiResponse apiResponse)` - use `addApiResponse(String, ApiResponse)` instead (229)
    - `get(Object key)` - use `getApiResponse(String)` instead (248)
    - `containsKey(Object key)` - use `hasApiResponse(String)` instead (248)
    - `put(String key, PathItem value)` - use `addApiResponse(String, ApiResponse)` instead (248)
    - `putAll(Map<? extends String, ? extends PathItem> m)` - use `setAPIResponses(Map)` instead (248)
    - `remove(Object key)` - use `removeApiResponse(String)` instead (248)
  - `Callback`
    - `get(Object key)` - use `getPathItem(String)` instead (248)
    - `containsKey(Object key)` - use `hasPathItem(String)` instead (248)
    - `put(String key, PathItem value)` - use `addPathItem(String, PathItem)` instead (248)
    - `putAll(Map<? extends String, ? extends PathItem> m)` - use `setPathItems(Map)` instead (248)
    - `remove(Object key)` - use `removePathItem(String)` instead (248)
  - `Content`
    - `get(Object key)` - use `getMediaType(String)` instead (248)

- `containsKey(Object key)` - use `hasMediaType(String)` instead (248)
- `put(String key, PathItem value)` - use `addMediaType(String, MediaType)` instead (248)
- `putAll(Map<? extends String, ? extends PathItem> m)` - use `setMediaTypes(Map)` instead (248)
- `remove(Object key)` - use `removeMediaType(String)` instead (248)
- `OASFactory`
  - `createScopes` - use `Map<String, String>` for scopes instead (328)
  - `createServerVariables` - use `Map<String, ServerVariable>` for server variables instead (245)
- `OAuthFlow`
  - `setScopes(Scopes scopes)` - use `setScopes(Map)` instead (328)
  - `scopes(Scopes scopes)` - use `scopes(Map)` instead (328)
- `OpenAPI`
  - `path(String name, PathItem path)` - use `Paths#addPathItem(String, PathItem)` on `OpenAPI#getPaths` instead (247)
- `Path`
  - `get(Object key)` - use `getPathItem(String)` instead (248)
  - `containsKey(Object key)` - use `hasPathItem(String)` instead (248)
  - `put(String key, PathItem value)` - use `addPathItem(String, PathItem)` instead (248)
  - `putAll(Map<? extends String, ? extends PathItem> m)` - use `setPathItems(Map)` instead (248)
  - `remove(Object key)` - use `removePathItem(String)` instead (248)
- `PathItem`
  - `readOperations` - use `Map#values()` on `PathItem#getOperations()` instead (256)
  - `readOperationsMap` - use `getOperations()` instead (256)
- `Schema`
  - `getAdditionalProperties` - use `getAdditionalPropertiesSchema()` or `getAdditionalPropertiesBoolean()` instead (257, 281)
  - `setAdditionalProperties(Schema additionalProperties)` - use `setAdditionalPropertiesSchema(Schema)` instead (257, 281)
  - `setAdditionalProperties(Boolean additionalProperties)` - use `setAdditionalPropertiesBoolean(Boolean)` instead (257, 281)
  - `additionalProperties(Schema additionalProperties)` - use `additionalPropertiesSchema(Schema)` instead (257, 281)
  - `additionalProperties(Boolean additionalProperties)` - use `additionalPropertiesBoolean(Boolean)` instead (257, 281)
- `SecurityRequirement`

- `get(Object key)` - use `getScheme(String)` instead (248)
- `containsKey(Object key)` - use `hasScheme(String)` instead (248)
- `put(String key, PathItem value)` - use `addScheme(String, List)` instead (248)
- `putAll(Map<? extends String, ? extends PathItem> m)` - use `setSchemes(Map)` instead (248)
- `remove(Object key)` - use `removeScheme(String)` instead (248)
- **Server**
  - `setVariables(ServerVariables variables)` - use `setVariables(Map)` instead (245)
  - `variables(ServerVariables variables)` - use `variables(Map)` instead (245)

## API/SPI Changes

- The `@SchemaProperty` annotation has been added to allow the properties for a schema to be defined inline. (360). For example:

```
@Schema(properties={
    @SchemaProperty(name="creditCard", required=true),
    @SchemaProperty(name="departureFlight", description="The departure flight
information."),
    @SchemaProperty(name="returningFlight")
})
```

- The `@RequestBodySchema` annotation has been added to provide a shorthand mechanism to specify the schema for a request body (363). For example:

```
@RequestBodySchema(MyRequestObject.class)
```

- The `@APIResponseSchema` annotation has been added to provide a shorthand mechanism to specify the schema for a response body (363). For example:

```
@APIResponseSchema(MyResponseObject.class)
```

- The `mp.openapi.schema.*` MicroProfile Config property has been added to allow the schema for a specific class to be specified. This property would typically be used in cases where the application developer does not have access to the source code of a class (364). For example:

```
mp.openapi.schema.java.time.Instant = { \
    "name": "EpochSeconds", \
    "type": "number", \
    "format": "int64", \
    "title": "Epoch Seconds", \
    "description": "Number of seconds from the epoch of 1970-01-01T00:00:00Z" \
}
```

## Functional Changes

- Getter methods on model interfaces that return a list or map now return a copy of the list/map containing the same items. This list/map CAN be immutable. (240)
- Setter methods on model interfaces that take a list or a map as a parameter MUST not use the list/map instance directly (284)

## Other Changes

- JavaDoc updates to clarify the behaviour of getter methods on model interfaces that return a list or map ((240), 288)
- TCK updates to verify that getter methods on model interfaces return a list or map, return a copy of underlying collection ((240), 288)

# Release Notes for Microprofile OpenAPI 1.1

Changes include:

- the addition of the JAXRS 2.1 `PATCH` method
- automatic hide MicroProfile Rest Client interfaces
- `OASFactoryResolver` is now a proper `SPI` artifact
- builder methods now have default implementations
- `@Content` now supports a singular `example` field
- `@Extension` now has a `parseValue` field for complex values
- TCK updated to support newer `3.0.x` versions
- overall Javadoc enhancements (classes and packages)
- various other minor improvements to the annotations, models and TCK
  - bug fixes, documentation updates, more convenience methods, deprecations, etc.



# Release Notes for MicroProfile OpenAPI 1.0

First official release of MP OpenAPI. Highlights of the release:

- set of annotations that covers the entire OpenAPI v3 specification when combined with JAX-RS annotations.
- set of OpenAPI v3 models covering the entire OpenAPI v3 specification, with corresponding APIs to provide a bootstrap or complete model tree.
- configuration injected via MicroProfile Config specification.
- ability to provide static (partial or complete) OpenAPI v3 files.
- definition of an HTTP endpoint, `/openapi`, that provides YAML and JSON representations of the generated OpenAPI v3 document.